

Date	Fixture	Project	Quantity
------	---------	---------	----------

Thinline DTL

Recessed SPK

Features

- Architectural luminaire
- Contemporary and minimal design
- Recessed with spackle flange
- 3 widths with multiple lengths
- Continuous run option
- Dry and damp rated for indoor applications
- Designed and Manufactured in North America
- 5 Year Warranty



Specifications

Construction

Aluminum Extruded Body
Powder Coated Finish

Dimensions

Widths: 2.25", 3.18", 4.5"
Height: 4"

Lengths (single units): 2' - 8', available in 6" increments
Continuous Run: Min 2', available in 6" increments
(100' max for one power drop)

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
4000K - 130 Lm/W
3500K - 98%
3000K - 95%
L90>70,000

Lumens/Ft - Direct/Indirect

Min: 250 Lm/ft - Max: 1200 Lm/ft

Color Temperature

2700K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

Control Options

Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh,
Enlighted Integral

Lens

Frosted Flat (std), Frosted Regressed, Clear, Louver (w/ frosted
regressed lens)

Accessories

10kV Surge Protection, Generator Transfer Device,
Emergency Battery

Mounting

Recessed with Spackle

Wiring

5 Leads
5 Wire
6 Wire (emergency battery option only)

Finishes

White - RAL 9003

Certifications

DLC
cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide

Sample Configuration: DTL REC SPK - 3.18 - 8 - D500 - 80 - 4K - U - FR - WH - DIMOFF - N - N


DTL REC SPK								WH	
Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage	Lens	Finish	Driver
Controls	Accessories								

Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage
DTL REC TRIM	2.25 3.18 4.5	2' - 8' (single Units) Available in 6" increments CR - Continuous Run - Min 2', available in 6" increments - Specify Length	D250 (min) - D1200 (max)	80 90	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V

Lens	Finish	Driver	Controls
FR - Frosted Flat Optional FFREG - Frosted Regressed ASY - Asymmetric Clear 0.5 FRDRP - 0.5" Frosted Drop Lens 1.5 FRDRP - 1.5" Frosted Drop Lens* LVR - Louver (w/ frosted regressed lens) Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only	WH - White	DIMOFF - 0-10V Dimming down to 1% Optional DALI - Digital Addressable Lighting Interface LUTRON - Lutron Ecosystem SR - Philips SR ELDO - Dim to 0.11% ELDO (347 only 1-10 5%)	N - None Optional SNS - Philips SNS 300 w/BLD & Daylight CLM - Encelium CLM LG - LG Dongle BT - Bluetooth Mesh EN - Enlighted Integral

Accessories
N - None Optional 10kV - 10kV Surge Protection EM - Emergency Battery (5 or 6 Wire)* +GTD - Generator Transfer Device Note: EM - 2.25" & 3.18" models - min length 4', 4.5" model - min length 2'


Dimensions

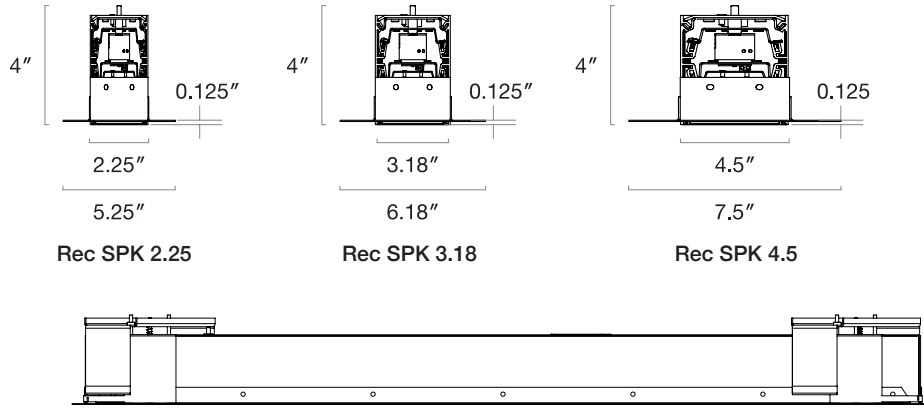


2': 27.2", 3': 39.2", 4': 51.2", 5': 63.2", 6': 75.2", 7': 87.2", 8': 99.2"

Note: Dimensions are for reference only. Please make measurements for actual dimensions


Distribution/Lens Options




Lambertian
Frosted Flat Lens




Lambertian
0.375" Frosted
Regressed Lens




Asymmetric
Clear Lens



Lambertian
0.5" Frosted
Drop Lens



Lambertian
1.5" Frosted
Drop Lens



Lambertian
Louver w/ 0.375"
Frosted Regressed
Lens

Mounting

