


Date	Fixture	Project	Quantity
------	---------	---------	----------

Thinline DTL

Recessed Trim

Features

- Architectural luminaire. Contemporary and minimal design
- Recessed with trim
- 3 widths with multiple lengths
- Continuous run option
- Dry and damp rated for indoor applications
- Designed and Manufactured in North America
- 5 Year Warranty

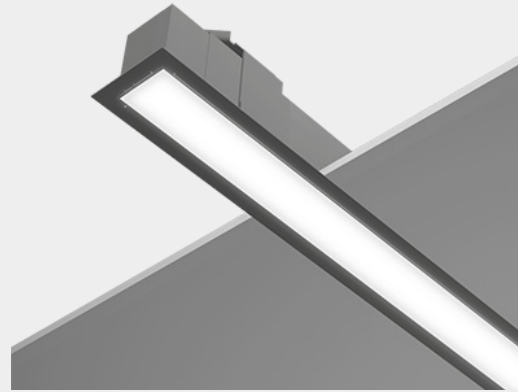

Specifications

Construction

Aluminum Extruded Body
Powder Coated Finish

Dimensions

Widths: 2.25", 3.18", 4.5"
Height: 4"

Lengths (single units): 2' - 8', available in 6" increments
Continuous Run: Min 2', available in 6" increments
(100' max for one power drop)

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
4000K - 130 Lm/W
3500K - 98%
3000K - 95%
L90>70,000

Lumens/Ft - Direct/Indirect

Min: 250 Lm/ft - Max: 1200 Lm/ft

Color Temperature

2700K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Driver

0-10V Dimming down to 1%, DALI, Lutron, Philips SR, ELDO

Control Options

Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral

Lens

Frosted Flat (std), Frosted Regressed, Clear, Louver (w/ frosted regressed lens)

Accessories

10kV Surge Protection, Generator Transfer Device, Emergency Battery

Mounting

Recessed with Trim

Wiring

5 Leads
5 Wire
6 Wire (emergency battery option only)

Finishes

White - RAL 9003

Certifications

DLC
cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide

Sample Configuration: DTL REC TRIM - 3.18 - 8 - D500 - 80 - 4K - U - FR - WH - DIMOFF - N - N

DTL REC TRIM								WH	
Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage	Lens	Finish	Driver
Controls	Accessories								


Model	Width	Length/CR	Direct Lm/Ft	CRI	Color Temp	Voltage
DTL REC TRIM	2.25 3.18 4.5	2' - 8' (single Units) Available in 6" increments CR - Continuous Run - Min 2', available in 6" increments - Specify Length	D250 (min) - D1200 (max)	80 90	27K - 2700K 3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V

Lens	Finish	Driver	Controls
FR - Frosted Flat Optional FFREG - Frosted Regressed ASY - Asymmetric Clear LVR - Louver (w/ frosted regressed lens)	WH - White	DIMOFF - 0-10V Dimming down to 1% Optional DALI - Digital Addressable Lighting Interface LUTRON - Lutron Ecosystem SR - Philips SR ELDO - Dim to 0.11% ELDO (347 only 1-10 5%)	N - None Optional SNS - Philips SNS 300 w/BLD & Daylight CLM - Encelium CLM LG - LG Dongle BT - Bluetooth Mesh EN - Enlighted Integral


Accessories
N - None Optional 10kV - 10kV Surge Protection EM - Emergency Battery (5 or 6 Wire) +GTD - Generator Transfer Device Note: EM - 2.25" & 3.18" models: min length 4', 4.5" model: min length 2'

Dimensions


Shipping Position (Closed)



Rec Trim 2.25




Rec Trim 3.18




Rec Trim 4.5


Mounting Position (Open)



Rec Trim 2.25




Rec Trim 3.18




Rec Trim 4.5

Lengths




Top




2': 25.52", 3': 37.52", 4': 49.52", 5': 61.52", 6': 73.52", 7': 85.52", 8': 97.52"

Note: Dimensions are for reference only. Please make measurements for actual dimensions


Distribution/Lens Options




Lambertian
Frosted Flat Lens



Lambertian
0.375" Frosted
Regressed Lens




Asymmetric
Clear Lens



Lambertian
Louver w/ 0.375"
Frosted Regressed
Lens

Mounting

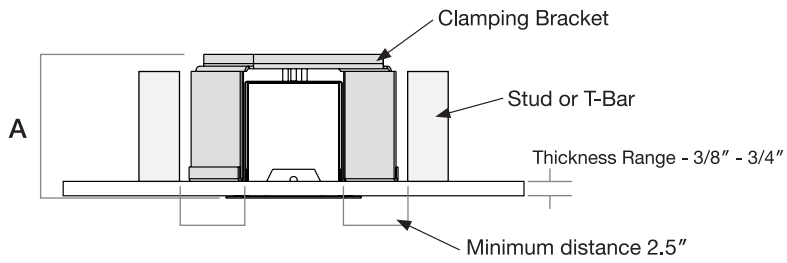

$$A = 4.5'' + \text{Thickness Range}$$