

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline Spots

## Suspended Direct

Architectural spotlights. Aluminum extruded body. Pendant mounting. Cast end caps with light block. 4 size options. Spotlight driver 0-10V dimming. Universal 120/277 voltage. Dry and damp rated.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

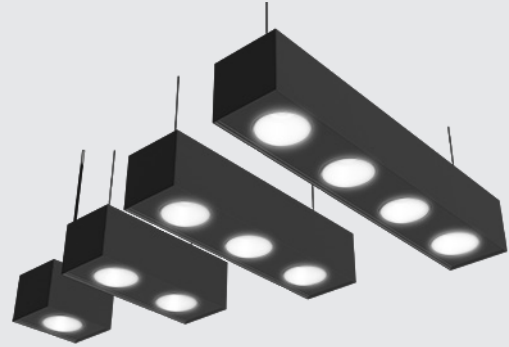

### Performance

4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W

### Ordering Options

Sample Configuration: DTL SPT - 10W - 3 - 80 - 4K - N - BLK - AC - DIMOFF - N - N - 5WIRE - CL - 10 - BLK

Model	Watts	Spots	CRI	Color Temp	Spot Reflector	Finish	Mounting
DTL SPT	10W	1 - Spots	80	27K 2700K	N Narrow - 20°	WH White	AC Aircraft Cable 10' (Std)
		2 - Spots	90	3K 3000K	M Medium - 30°	BLK Black	<i>Optional</i>
	3 - Spots	35K 3500K	4K 4000K	W Wide - 50°	GRY Grey	TR Threaded Rod	
	4 - Spots	4K 4000K	5K 5000K		CU Custom	TB9/16 T-Bar 9/16 Clip	
							TB15/16 T-Bar 15/16 Clip
						- For custom finishes please specify RAL number	- For threaded rod, please specify length
						- See Finish Options	

DTL SPT

Driver	Controls	Accessories	Wiring
DIMOFF 0-10V DIMOFF	N None	N None	5 WIRE 5 Wire (Std)
<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
TRI Triac Dimming	SNS Philips SNS 300 w/BLD & Daylight	10kV 10kV Surge Protection	N 5 Leads
ELV Electronic Low Voltage	CLM Encelium CLM	+GTD Generator Transfer Device	
	LG LG Dongle		
	BT Bluetooth Mesh		
	EN Enlighted Integral		


Wire Color	Wire Length	Canopy Finish
CL Clear	Length(Ft)	WH White
<i>Optional</i>		BLK Black
B Black		GRY Grey
W White		CU Custom
		- For custom finishes please specify RAL number
		- See Finish Options

### Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916

Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737


### Spot Beam

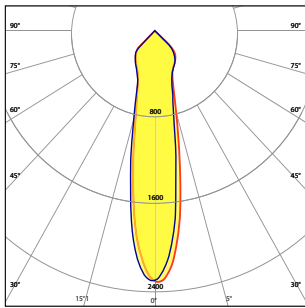

20° Spot Beam

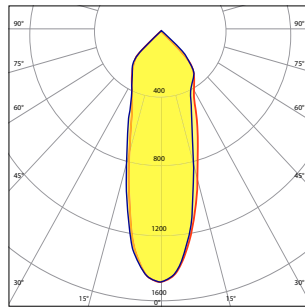


30° Medium Beam

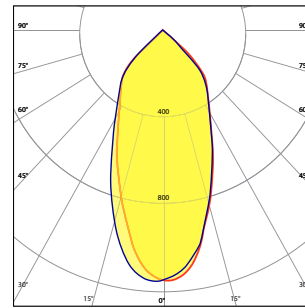


50° Wide Beam

**Dimensions**


**Del Spot 1**

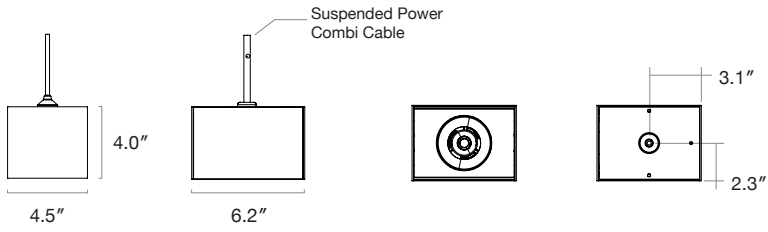


**Del Spot 2**

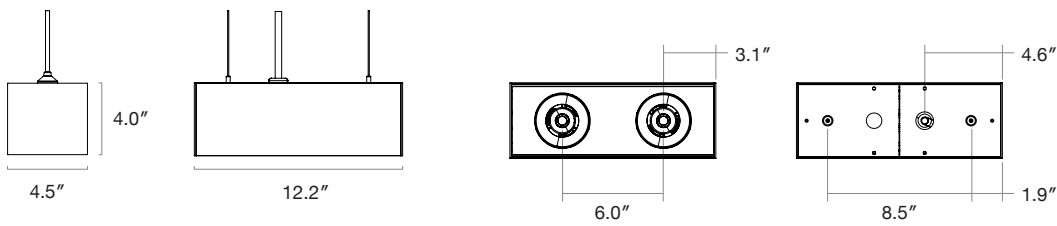


**Del Spot 3**

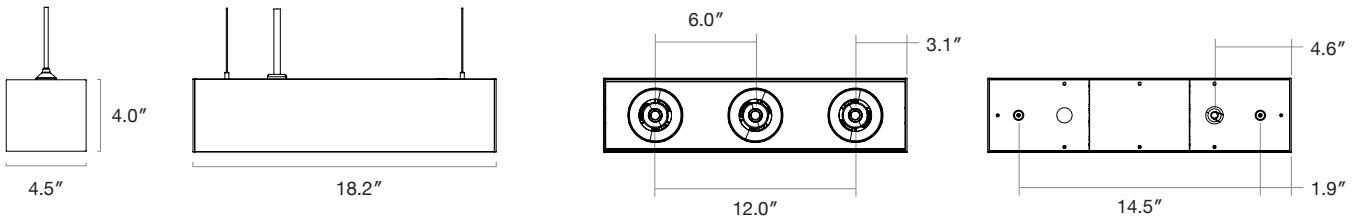


**Del Spot 4**

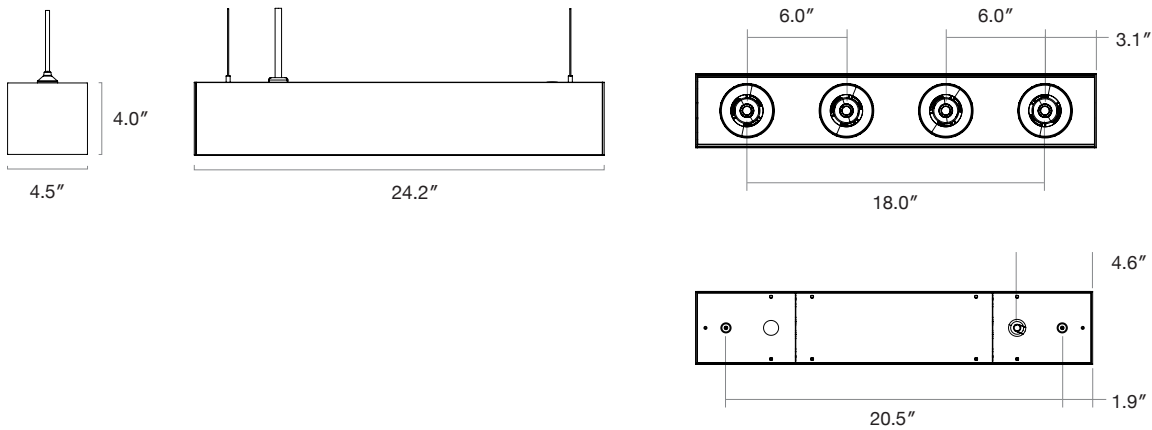

**Mounting Options**

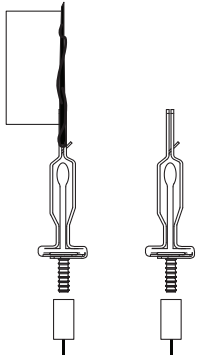

T-Bar  
Jbox (others)




Ø 4.5"  
Power Feed




Ø 2"  
Non Power Feed


Aircraft Cable ACY

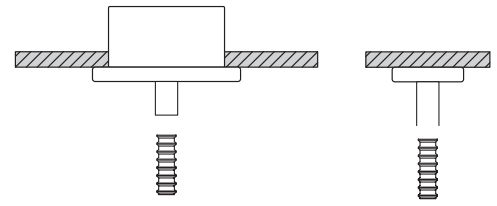

Stem



T-Bar  
Jbox (others)




Anchor (others)  
Aircraft Cable Coupler Supplies  
1/4" - 20 Thread Required (1)

Drywall

## Finish Options

### Standard RAL Finishes



**Signal White**  
RAL 9003




**Telegrey 2**  
RAL 7046




**Signal Black**  
RAL 9004


### Sample Custom RAL Finishes




**Traffic White**  
RAL 9016




**Papyrus White**  
RAL 9018




**Graphic Grey**  
RAL 7024



**Light Grey**  
RAL 7035



**Jet Black**  
RAL 9005



**Graphic Black**  
RAL 9011




**Azure Blue**  
RAL 5009




**Gentian Blue**  
RAL 5010



**Sky Blue**  
RAL 5015



**Pastel Orange**  
RAL 2003



**Pure Orange**  
RAL 2004



**Daffodil Yellow**  
RAL 1007




**Lemon Yellow**  
RAL 1012



**Zinc Yellow**  
RAL 1018




**Coral Red**  
RAL 3016



**Rose**  
RAL 3017



**Traffic Red**  
RAL 3020



**Salmon Pink**  
RAL 3022



**Olive Green**  
RAL 6003



**Moss Green**  
RA 6005



**Grass Green**  
RAL 6010




**Claret Violet**  
RAL 4004



**Traffic Purple**  
RAL 4006



**Pearl Blackberry**  
RAL 4012



**Beige**  
RAL 1001



**Nut Brown**  
RAL 8011



**Sepia Brown**  
RAL 8014



**Mahogany Brown**  
RAL 8016

Custom Finishes - Please contact factory  
Additional Finishes Available - Please contact factory