



Date: _____ Fixture: _____

QTY: _____ Project: _____



Del Task Linear Retrofit

Commercial LED Retrofit Luminaire. Aluminum construction. 4' and 8' length options. Easy installation. Frosted and clear lens available. Fits into 4.25" and 5" housings. cULus listed.

Designed and manufactured in North America. 5 Year Warranty.

Ordering Options

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL TASK	1x4	20, 30, 40, 60	80	3K 3000K	U 120/277V H 347V	NL Normal Frosted Lens	WH White
	1x8	30, 40, 60, 80	90	35K 3500K 4K 4000K 5K 5000K			
DEL TASK						NL	WH

Mounting

- 4.25 4.25" Housing
- 5 5" Housing



Sample Configuration: DEL TASK - 1x4 - 30 - 80 - 4K - U - NL - WH - 5

Note: For custom configurations please contact factory


Product Specifications

Efficacy:	1x4: Up to 164 Lm/W 1x8: Up to 154 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	100,000+ Life Hours (L70)
Voltage:	120/277V 347/480V
Operating Temperature:	-20°C to +55°C -4°F to +131°F
Controls:	0-10V Dimming
Mounting:	4.25" and 5" Housing
Accessories:	Occupancy Sensor(on/off), Ultrasonic BLD Sensor, Integral Programmable Microwave Sensor, Emergency Battery, Wattstopper (Programmable), 10kV Surge Protection


Output Performance

Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Del Task 1x4 20	21.2	164.4	3,485.8	Del Task 1x8 30	31.4	154	4,835
Del Task 1x4 30	30.7	144.3	4,431.3	Del Task 1x8 40	40.6	154	6,406
Del Task 1x4 40	41.7	141.9	5,909.6	Del Task 1x8 60	60	154	9,240
Del Task 1x4 60	60	137.5	8,250	Del Task 1x8 80	80	151	12,080

Dimensions

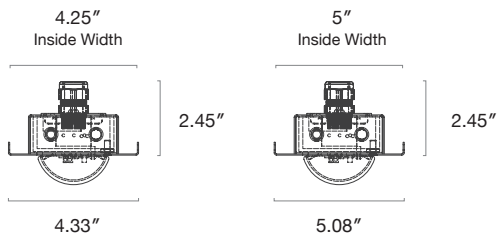

DelTask 4



DelTask 8 (2x4)



Quick Connect for DelTask 8'

