


Date	Fixture	Project	Quantity
------	---------	---------	----------

Del Task

Linear Retrofit

Features

- Linear LED retrofit
- Aluminum construction
- 4' and 8' lengths
- Fits into 4.25" and 5" housings
- Easy installation
- Dry and damp rated
- Designed and Manufactured in North America
- 5 Year Warranty

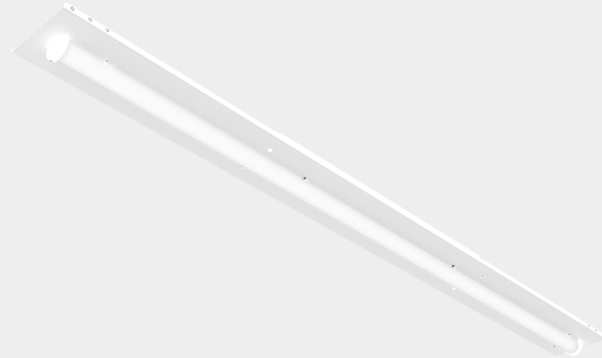

Specifications

Construction

Formed Aluminum Construction
Power Coated Finish

Dimensions

Widths: 4.33" (4.25" Housing) | 5.08" (5" Housing)
Height: 2.45"
Lengths: 48" | 96"

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
100,000+ Life Hours (L70)

Efficacy

Del Task 1x4: Up to 164 Lm/W
Del Task 1x8: Up to 154 Lm/W

Watts

Del Task 1x4: 20W - 60W
Del Task 1x8: 30W - 80W

Color Temperature

3000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Controls

0-10V Dimming down to 1%

Lens

Frosted

Sizes/Housing

4.25"
5"

Finishes

White - RAL 9003

Certifications

DLC
cULus




Ordering Guide

Sample Configuration: DEL TASK - 1x4 - 30 - 80 - 4K - U - WH - 5

DEL TASK					CL	NL	WH		
Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting/Housing
DEL TASK	1x4 1x8	20, 30, 40, 60 30, 40, 60, 80	80 90	3K - 3000K 35K - 3500K 4K - 4000K 5K - 5000K	U - 120/277V H - 347V	NL - Normal Frosted Lens	WH - White	4.25 - 4.15" Housing 5 - 5" Housing

Dimensions

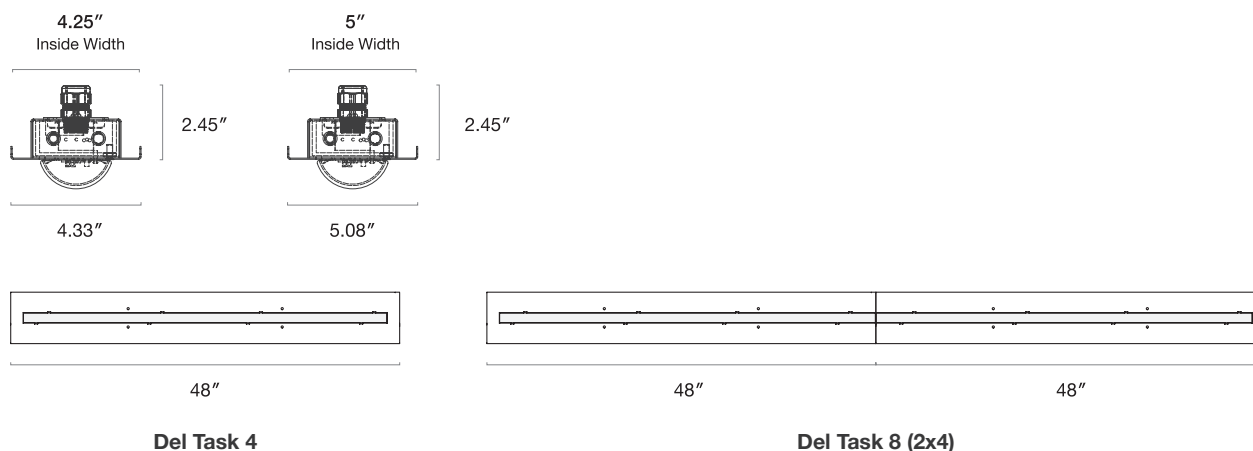

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Del Task 1x4 20	21.2	150.9	3200
Del Task 1x4 30	31.45	137.9	4336
Del Task 1x4 40	41.7	131.25	5465

Quick Connect for Del Task 8'

