




Date: _____ Fixture: _____

QTY: _____ Project: _____

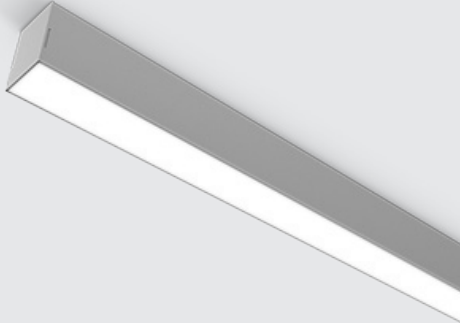

Thinline

Surface Direct

Cast End Caps with Light Block
Multiple Lens and Customizations Available

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Surface mount applications. Direct distribution. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours. cULus Listed.

Designed and manufactured in North America.
10 Year Warranty.



Model: Thinline 3.18

Ordering Options

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens
DTL SU	2.25	CR _____	D 250	80	27K 2700K	U 120/277V	FR Frosted
	3.18	Min 2Ft	D 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	4.5	- Available in 6in increments - Unibody up to 8Ft	D 750		35K 3500K		ASY Asymmetric
			D 1000		4K 4000K		.5 FR DROP .5" Frosted Drop Lens
			D _____ (custom up to 1200)		5K 5000K		1.5 FR DROP 1.5" Frosted Drop Lens
DTL SU							LVR Louver Lens

Finish	Mounting	Driver	Controls	Circuits
GRY Grey	S Solid	DIMOFF 0-10 1% DIMOFF	N None	1 1 Circuit
WH White	STB 9/16 9/16 T-Bar	LUTRON Lutron Ecosystem	DMX	
BLK Black	STB 15/16 15/16 T-Bar	SR Philips SR	SNS Philips SNS 300 w/BLD & Daylight	
CU Custom (consult factory)		DALI	CLM Encellium CLM	
		ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle	
			BT Bluetooth Mesh	
			EN Enlighted Integral	
				1

Accessories

- N None
- 10kV 10kV Surge Protection
- EMBAT 6W 90 Min Battery

Sample Configuration: DTL SU - 4.5 - 8 - D 250 - 80 - 4K - U - FR - GRY - S - DIMOFF - N - 1 - N


LED

L90 > 70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Performance

Model	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Lens Options

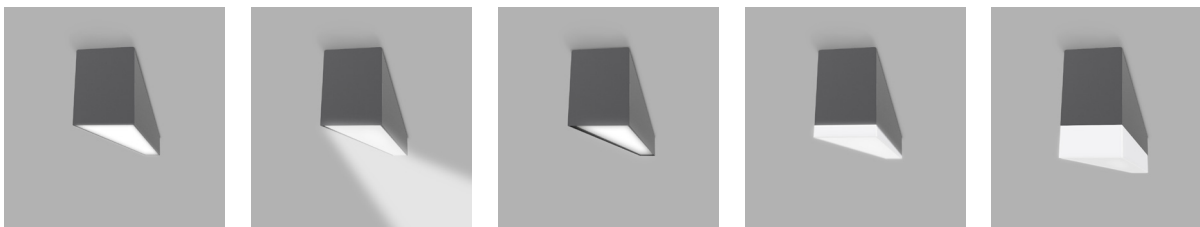

Flat


Asymmetric

0.25" Regressed

0.5" Drop Lens

1.5" Drop Lens


Dimensions

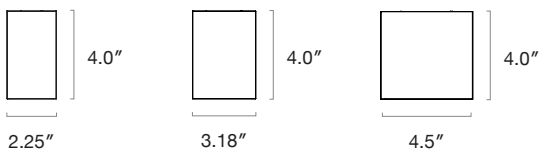


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"


Mounting



Solid Ceiling
1/4"-20 Thread Required (1)

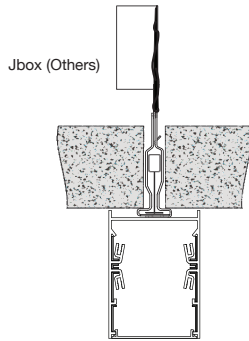

T-Bar 9/16"
Aircraft Cable (ACY)

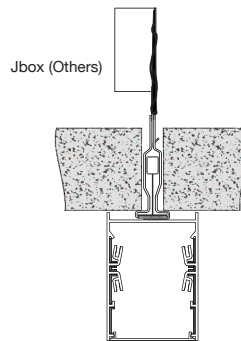

T-Bar 15/16"
Aircraft Cable (ACY)

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory